


Vent-Axia®

METEOR COOLER

Installation Manual and instructions for use

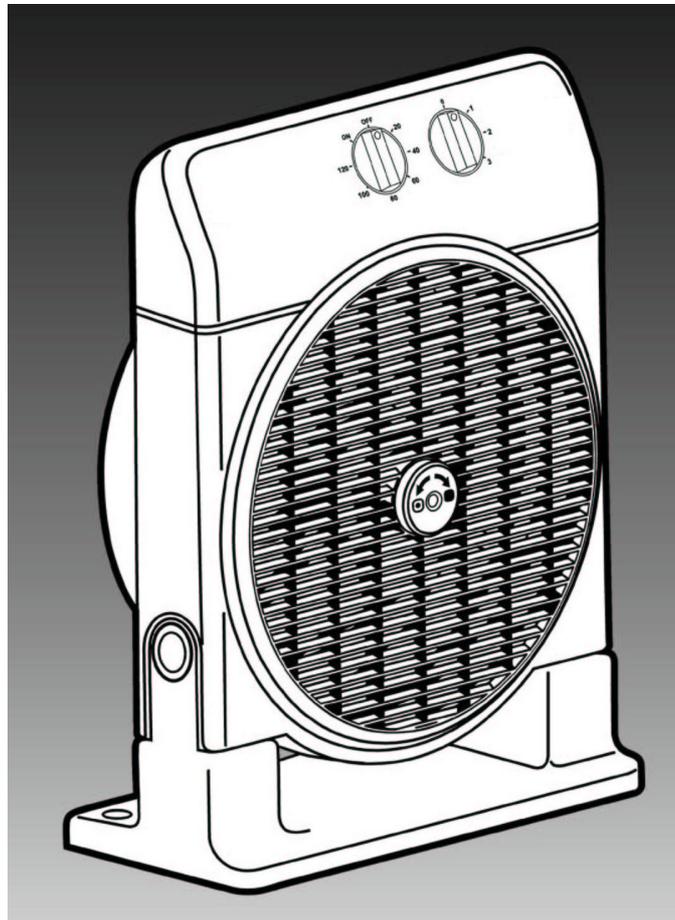

Stock Ref:- 13101100B

*READ INSTRUCTIONS IN CONJUNCTION WITH ILLUSTRATIONS
READ AND SAVE THESE INSTRUCTIONS*



The Vent-Axia Meteor - Cooler is a slimline three speed floor or wall/ceiling mounted cooling fan, with a rotating front grille which may be adjusted to give 360° or fixed direction airflow, and a built-in 2 hour timer.

Connection to a Power Supply

Ensure that the voltage and frequency shown on the rating label at the base of the fan body is compatible with your power supply voltage.

THE METEOR COOLER MUST NOT BE USED IN A BATHROOM, OR SITED IN AN AREA WITH GREASE OR OIL LADEN AIR.

Do NOT cover the Meteor Cooler when in use.

Do NOT handle the Meteor Cooler with wet hands.

Do NOT use the Meteor Cooler in workshops or rooms where excessive dust is generated or present.

FITTING

Floor Mounted

The Meteor Cooler can be floor mounted in an upright position or, if floor mounted an additional two tilt positions are available, To achieve each position, push the body of the fan backwards until a “click” is heard.

Wall/Ceiling mounting

The Meteor Cooler may also be wall/Ceiling mounted using N° 12 woodscrews or an equivalent. Ensure that there is a minimum distance of 150mm (6”) between the top of the Meteor Cooler and the ceiling.

When the Meteor Cooler is wall/ceiling mounted there are five possible tilt positions available, see **Fig.4**. The Meteor Cooler should be mounted with the control switch at the top of the unit to prevent unauthorised tampering.

Selecting Speed (Fig.1.)

Fan Speed.	0 – Off
	1 – Low speed.
	2 – Medium speed.
	3 – High speed.

Timer Operation Mode

You can control the operation time of the fan using the central control (**Fig.2.**), Turn the control clockwise to select the desired time, up to a maximum of 2 hours (120 minutes).

Once the time selected has passed, the fan will automatically stop.

Fixed Position Louvre Grille

For a fixed direction of airflow, turn the centre grille control switch anti-clockwise until it clicks into position.(**Fig.3.**)

Rotating Louvre Grille

For rotating louver grille, turn the centre grille control switch clockwise until it clicks into position. (**Fig.3.**)

Slant Adjustment

The Meteor Cooler has 5 possible base slant grades to project the air in different directions, Both when the fan is on a horizontal surface and when it is fitted to a wall or ceiling (**Fig.4.**) In order to modify the slant, simply support the base and push the fan backwards, until you hear a click. You will usually find some resistance.

Note:- The maximum slant can only be selected for wall or ceiling mounted fans.

Maintenance

The Meteor Cooler does not require special maintenance. When cleaning, make sure that the fan is disconnected from the power supply.

We recommend cleaning the impeller/grille once a year, this should only be carried out by a suitably qualified person. **Never** submerge the fan in water or place under a running tap.

Do not use corrosive products or petrol, simply clean with a damp cloth and some detergent.

Fig.1

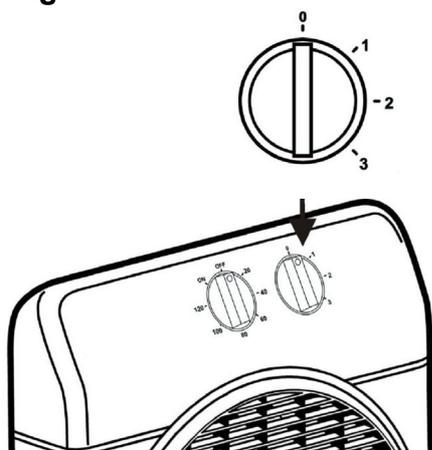


Fig.2

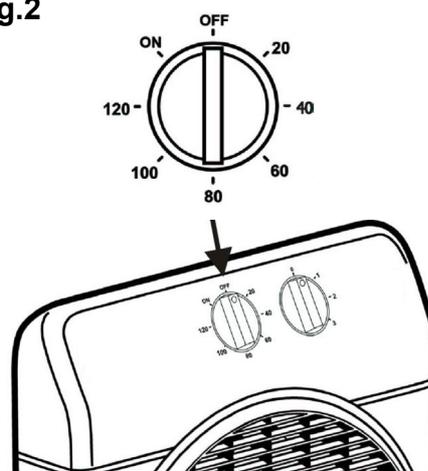


Fig.3


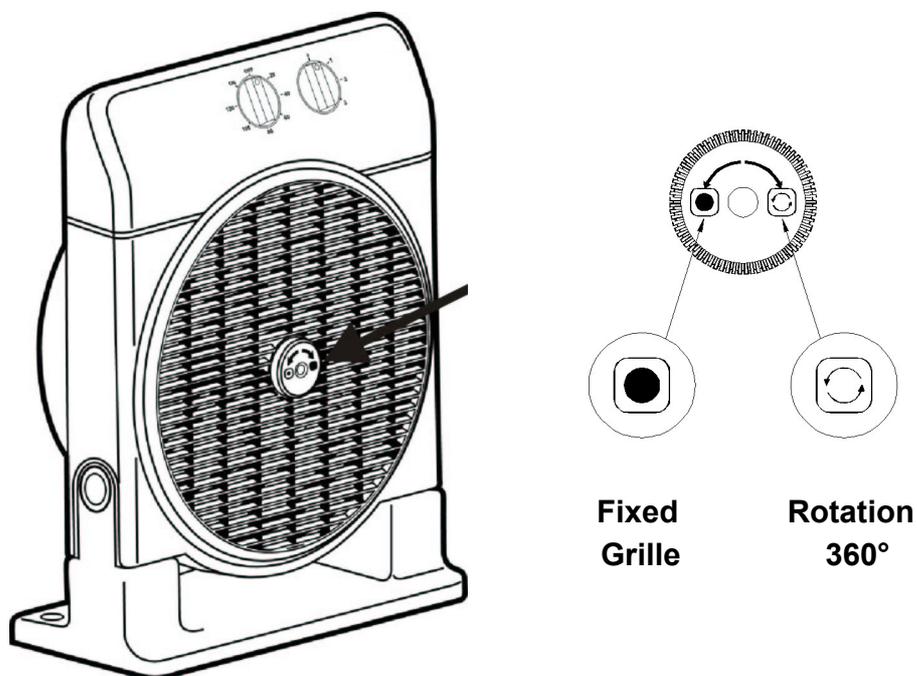


Fig.4

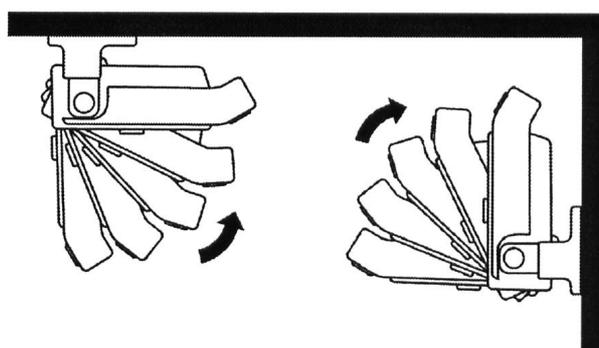

**VENT-AXIA CONTACT NUMBERS
UK NATIONAL SALES CENTRE**

Domestic & Commercial

Tele: 01293 530202
Fax: 01293 565169

Industrial

Tele: 01293 441570
Fax: 01293 534898

REPUBLIC OF IRELAND

Vent-Axia Ventilation Ltd.

Tele: (01) 450 4133 Fax: (01) 450 4570

UK NATIONAL TECHNICAL SUPPORT

Domestic & Commercial

Tele: 01293 526062
Fax: 01293 551188

Industrial

Tele: 01293 455196
Fax: 01293 455197

Internet site at: www.vent-axia.com

Email: info@vent-axia.com

The Vent-Axia Guarantee

Applicable only to products installed and used in the United Kingdom. For details of the Guarantee outside of the United Kingdom contact your local supplier.

Vent-Axia guarantees this product for two years from the date of purchase against faulty material or workmanship. In the event of any part being found to be defective, the product will be repaired, or at the Company's discretion the product will be replaced without charge, provided that the product:

- 1). Has been installed and used in accordance with the instruction given with each unit.
- 2). The electricity supply complies with the rating label.
- 3). Has not been misused, neglected or damaged.
- 4). Has not been modified or repaired by any person not authorized to do so by Vent-Axia.

IF CLAIMING UNDER THE TERMS OF THE GUARANTEE

Please return the complete product, carriage paid to your original supplier by post or in person. Please ensure that it is adequately packed and accompanied by a letter clearly marked 'Guarantee Claim' stating the nature of the fault and providing proof of the date and source of purchase.

As part of the policy of continuous product improvement
Vent-Axia reserve the right to alter specifications without notice

Vent-Axia®